

PERFORATED PANEL SPECIFICATIONS

Panel Type:

ASM Lev-A-Flow AF200 perforated panel without damper to be interchangeable with the ASM FS and S-Series raised access floor panels.

Panel Requirements:

25% free area air flow panel to properly distribute airflow to areas requiring additional ventilation. Panel allows adjustment in thickness to match the abutting solid panels. Panel shall use ASM Positive Ground Device (PGD) to ensure grounding of the panel to the understructure with less than 10 ohms resistance.

Panel Finish:


1/16" high pressure laminate finish #ASM-2205 edged with SmartTrim™ Technology

Manufacturer:


ASM Modular Systems, Inc
Phone: (843)534-1110

Your local ASM representative:


Advanced Contracting Enterprises, Inc.
740 Double J Road
Covington, LA 70433
(985)898-6311 Fax (985)898-0311

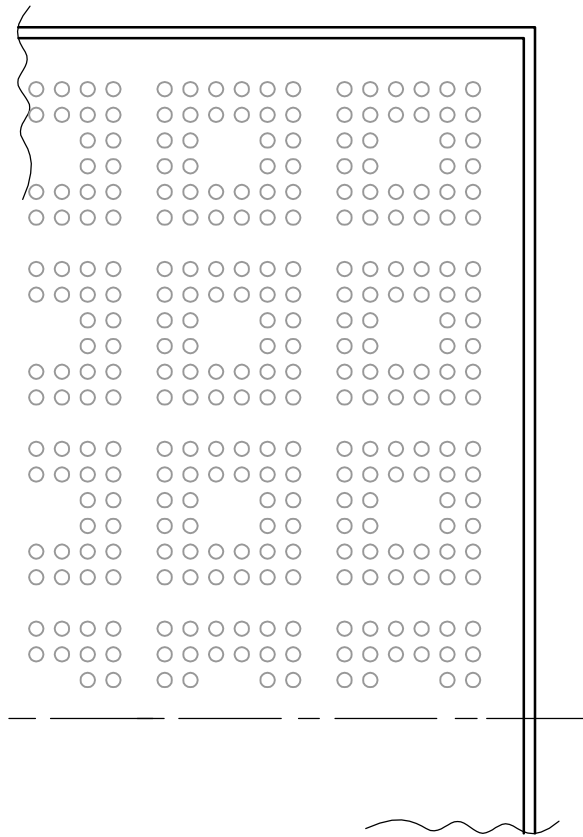


PARTIAL TOP VIEW

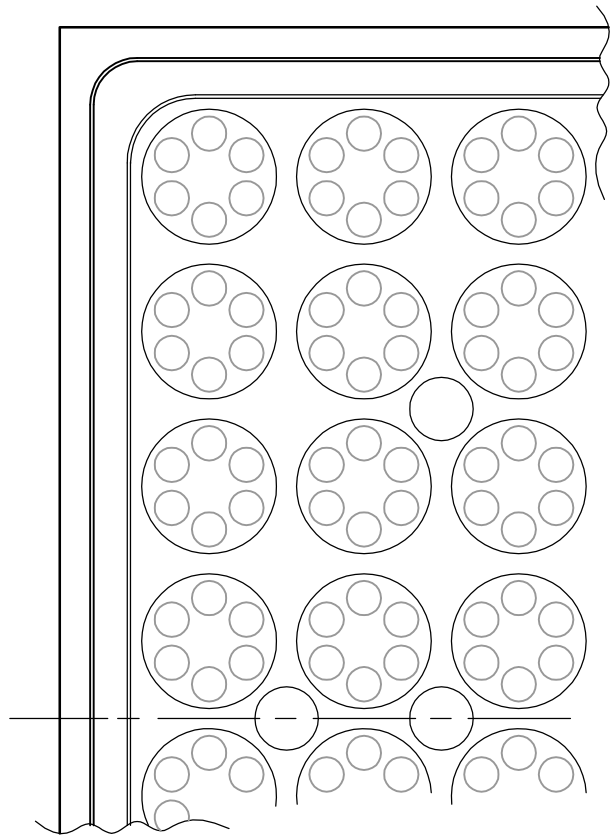

PARTIAL BOTTOM VIEW
(Shown Without Optional Damper)

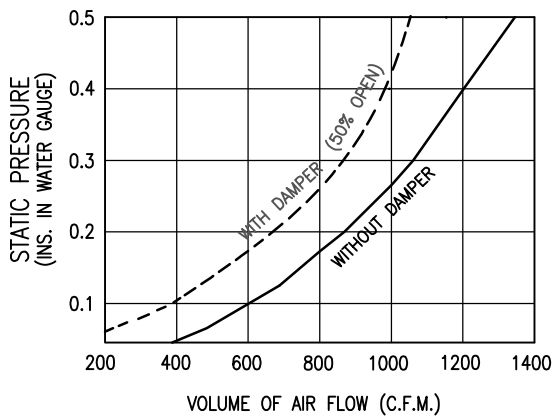


AIR FLOW CHARACTERISTICS

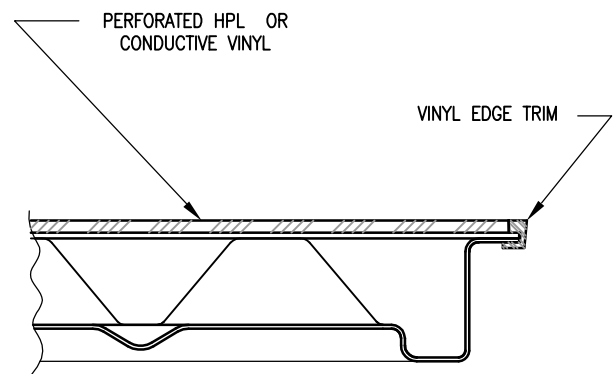

PARTIAL SECTION VIEW

SUPPLEMENTARY NOTES

1. PANEL IS PROTECTED WITH POWDER COAT EPOXY




ASM

Constructing a smarter building

USA 843.534.1110
CAN 905.819.5000

www.asmodularfloors.com
customerservice@asmodularfloors.com



PART NAME:


**AF200 PERFORATED
PANEL WITH EDGE TRIM
STANDARD OR METRIC**

PART NO:


SCALE:
NTS

DWG:


ASM_1038.dwg

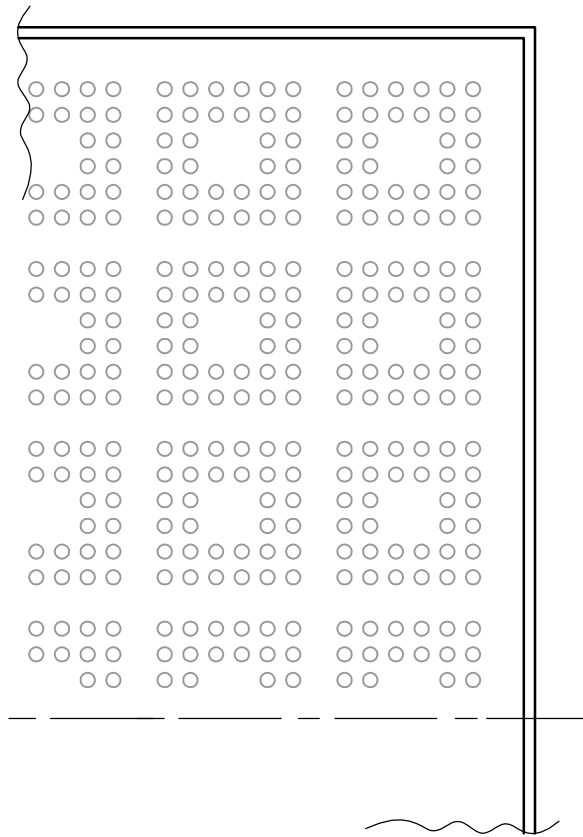


PARTIAL TOP VIEW

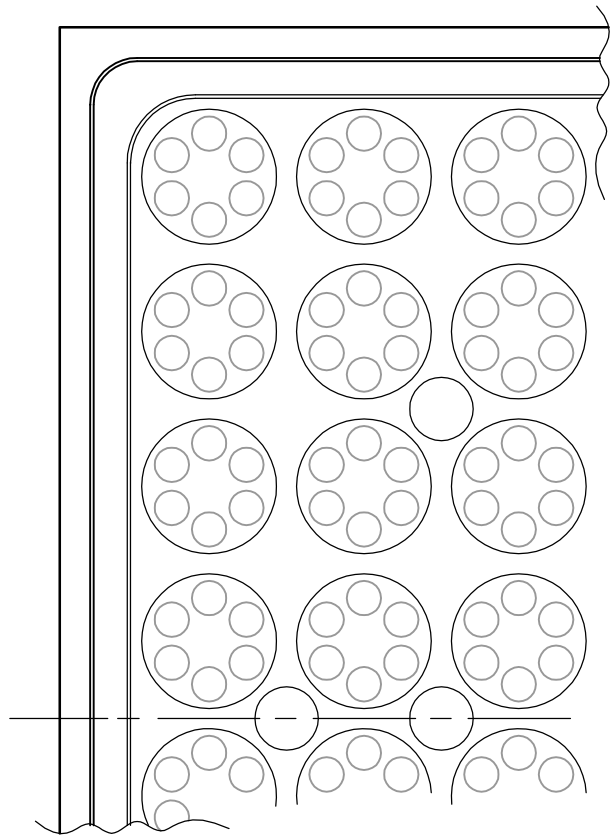

PARTIAL BOTTOM VIEW
(Shown Without Optional Damper)

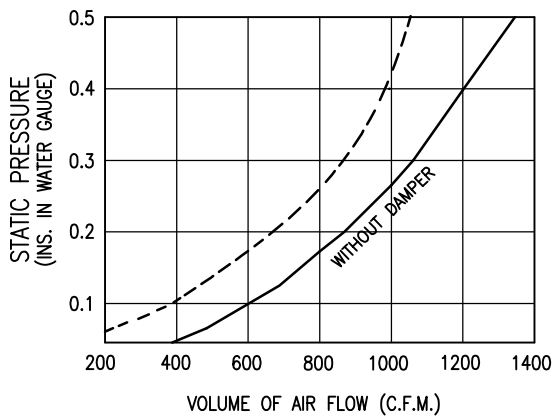


AIR FLOW CHARACTERISTICS

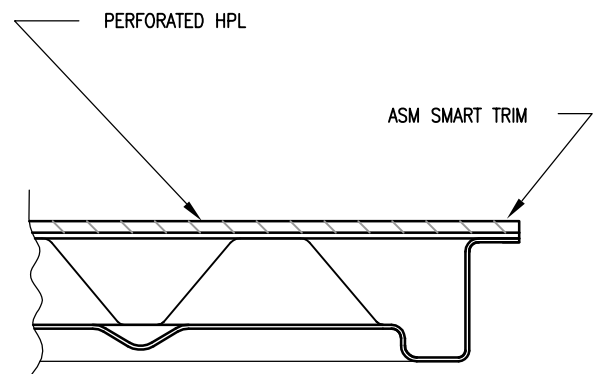

PARTIAL SECTION VIEW

SUPPLEMENTARY NOTES

1. PANEL IS PROTECTED WITH POWDER COAT EPOXY




ASM

Constructing a smarter building

USA 843.534.1110
CAN 905.819.5000

www.asmmodularfloors.com
customerservice@asmmodularfloors.com



PART NAME:

**AF200 PERFORATED PANEL
WITH ASM SMART TRIM
STANDARD OR METRIC**

PART NO:

SCALE:
NTS

DWG:

ASM_1038B.dwg