
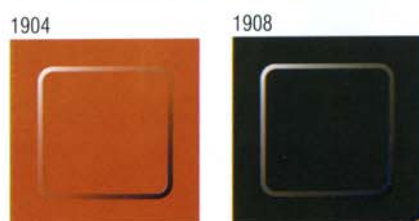
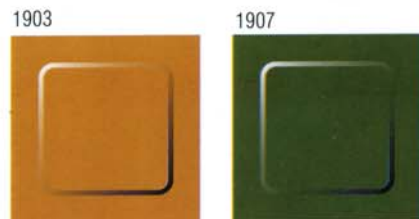
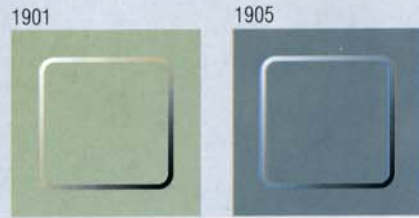


Standard Rubber Tile

Safe, beautiful and hard wearing for a variety of applications

Electrostatic Protection

- Static generation less than 20 volts per AATCC-134
- Easy to maintain - no conductive wax necessary
- Chemical and hot solder resistant
- Resistant to most oils and grease
- Ultra low vibration
- No carbon black for electrostatic dissipative flooring
- Outgassing according to ASTM-E-595-84 VCM less than 1.2%

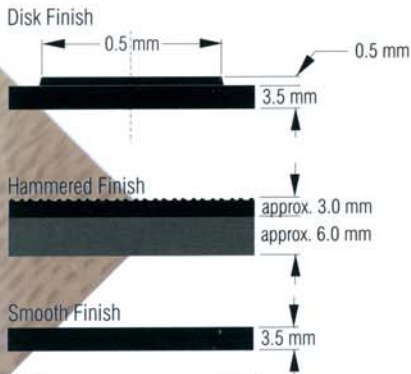

Hammered Finish

